



The Limodor Family

Ventilation units for a
healthy living environment



LIMODOR
INNOVATION ON AIR



LIMODOR B

flush mounted



LIMODOR B




surface mounted



LIMODOR C/E

surface-/flush mounted

type
assembly
dimensions



area of application

bathroom/lavatory

bathroom/lavatory

lavatory with
connection to toilet bowl
or cistern

electric current

230V, 0.095A, 21W

230V, 0.095A, 21W

230V, 0.095A, 22W

nominal air handling capacity

60 m³/h

60 m³/h

45 m³/h

maximal pressure

250 Pa

250 Pa

370 Pa

pressure difference

78 Pa

59 Pa

115 Pa

sound level

44 dB(A)

45 dB(A)

48 dB(A)

protection class

IP X5

IP X5

IP X4

shunt / numbers

not possible

not possible

not possible

connection to toilet bowl

possible

not possible

necessary

installation depth

80 mm

122 mm

exhaust duct

Ø 50 mm

Ø 63 mm

Ø 40 mm

suitable electronic controls:

delayed shut off relay (fix ca. 7 min.)

Type SNR od. SNR-E90

Type SNR od. SNR-E90

Type SNR od. SNR-E90

delayed shut off relay (adjustable)

Type SNR-EAV

Type SNR-EAV

Type SNR-EAV

Interval delayed shut off relay

Type SINR

Type SINR

Type SINR

Moisture relay


Type SFR

Type SFR

hints:


also available with
noise absorbing design-cover

Type CE-AP30 used as a
substitute of the small blower



LIMODOR F/E

flush mounted



kitchen,
habitable room,
in-line lavatories

230V, 0.15A, 34W

155 m³/h

270 Pa

80 Pa

55 dB(A)

IP X4

possible / 2

not possible

130 mm

Ø 80 mm

Type SNR od. SNR-E90

Type SNR-EAV

Type SINR


Type SFR



patented

LIMODOR F/M

flush mounted



kitchen
bathroom
lavatory

230V, 0.09(0.11)A, 11(23)W

60 (100) m³/h

250 Pa

133 (61) Pa

32 (38) dB(A)

IP X5

possible / 1

possible

100 mm

Ø 80/75 mm

Type C-NR/7

Type C-NR

Type C-IV¹

Type C-FR2¹

Austrian-patent No. 410125
European-patent No. 1028295


(numbers in barce are for 100m³/h)



patented

LIMODOR F/M

surface mounted



kitchen
bathroom
lavatory

230V, 0.09(0.11)A, 11(23)W

60 (100) m³/h

250 Pa

133 (55) Pa

37 (47) dB(A)

IP X5

not possible

not possible

Ø 80/75 mm

Type C-NR/7

Type C-NR

Type C-IV¹

Type C-FR2¹


Austrian-patent No. 410125
European-patent No. 1028295

(numbers in barce are for 100m³/h)



LIMODOR W

flush mounted

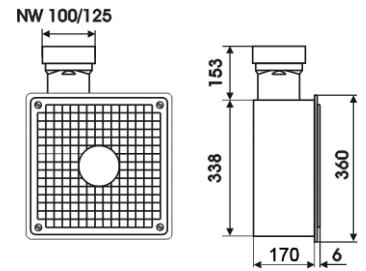

kitchen, public lavatory,
hobby room, fitness room
showroom

230V, 0.5A, 115W

385 m³/h

380 Pa

145 Pa

63 dB(A)

IP X4

possible / 3

not possible

170 mm

Ø 100/125 mm

usable with cover LW / B as a
central ventilation device

AirOdor

LIMODOR

AirVital

AirClean

AquaVent

LIMODOR

AirOdor

AquaVent

AirClean

AirOdor

QUALITY MADE IN AUSTRIA

The previous years LIMOT demonstrated technical innovation-strength, which reflects on the LIMODOR-products. LIMODOR-products are made of superior material and are rigorously tested before distribution. The test results are monitored externally by TÜV, ÖVE and VDE.

AirVital

AirClean

AirVital



LIMODOR



LIMOT Elektromotorenbaugesellschaft m.b.H. & Co.KG

Paschinger Str. 56, A-4060 Leonding

Phone: +43 732 67 13 56-0

Fax: +43 732 67 13 57-3

Prechtlgasse 9, A-1090 Vienna

Phone: +43 1 408 28 72-0

Fax: +43 1 408 28 72-22

office@limot.com | www.limot.com | www.limodor.com